

Changing cartridges is now as easy as:

Our  
revolutionary  
quick-change  
system

1



Easy

2



Clean

3



Done

## 3M High Flow SQC Features Include:

### AP902

- 304 stainless steel head
- 1" (2.54 cm) FNPT inlet/outlet connections with a 1" (2.54 cm) center core
- 20 gpm (75.7 lpm) flow rates
- 5 micron nominal sediment
- Non-woven blend pleat material
  - Over 16 sq. ft. (1.5 sq. meters) of surface area
- 100,000 gallon (378,541 liters) or one-year cartridge life
- Die-cast zinc locking latch
- Sanitary Quick Change cartridge change-out
- NSF Std 42 listed for Particulate Reduction Class V (pending)
- 3 times the efficiency of the AP810-2
- Overall height and diameter
  - 25 - 1/16" H (incl. bracket) x 4-1/5" D (63.7 cm x 11.4 cm)
- Overall weight
  - Dry - 7 lbs (3.2 kg)
  - Wet - 15 lbs (6.8 kg)
- Overall shipping weight
  - 7.25 lbs (3.4 kg)

### AP903

- 304 stainless steel head
- 1" (2.54 cm) FNPT inlet/outlet connections with a 1" (2.54 cm) center core
- 20 gpm (75.7 lpm) flow rates
- 5 micron nominal sediment
- Non-woven blend pleat material
  - Over 5 sq. ft. (.5 sq. meters) of surface area
- Patented Carbon Block Technology
  - Over 85% chlorine taste and odor reduction at 10 gpm (37.9 lpm)
- 100,000 gallon (378,541 liters) or one-year cartridge life
- Die-cast zinc locking latch
- Sanitary Quick Change cartridge change-out
- NSF Std 42 listed for Particulate Reduction Class V (pending)
- 3 times the life of the AP817-2
- Overall height and diameter
  - 25 - 1/16" H (incl. bracket) x 4-1/5" D (63.7 cm x 11.4 cm)
- Overall weight
  - Dry - 7.5 lbs (3.4 kg)
  - Wet - 15.5 lbs (7.0 kg)
- Overall shipping weight
  - 7.75 lbs (3.5 kg)



For more information, please call us at 800-222-7880, or visit [www.aquapure.com](http://www.aquapure.com)

©2008 3M Company. All rights reserved.  
3M is a trademark of 3M Company.  
CUNO is a trademark of 3M Company used under license.  
LIT2000 0408  
70-0202-0411-4

**CUNO Incorporated**  
a 3M Company  
400 Research Parkway  
Meriden, CT 06450-1018  
USA

# 3M™ Water Filtration


SPEC# \_\_\_\_\_

QUANTITY \_\_\_\_\_

application: **WHOLE HOUSE FILTRATION**

models:

## AP902/AP903

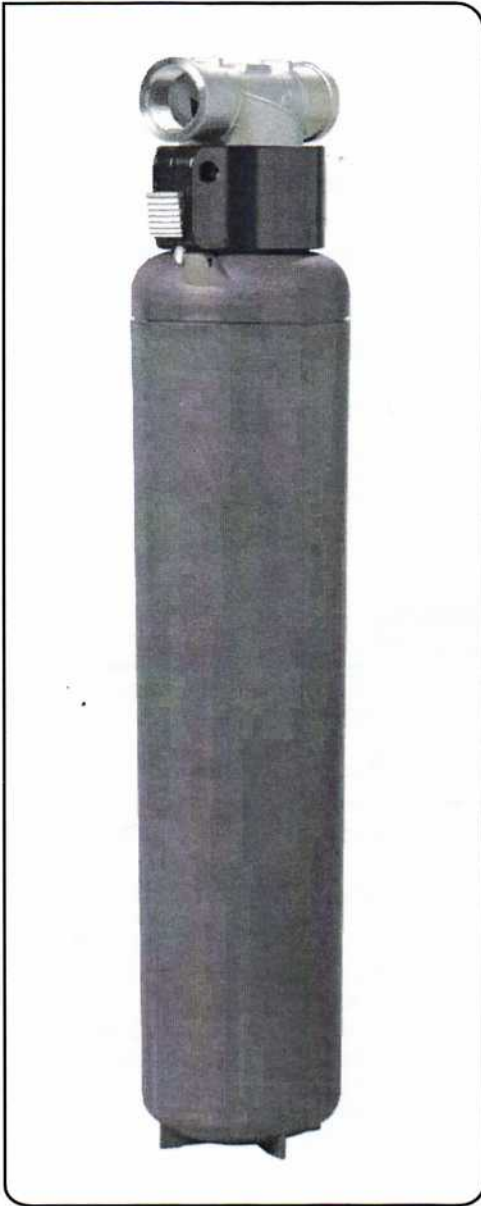

3M™ Water Filtration Products Models AP902/AP903 single cartridge water filtration systems help provide consistent high quality water for whole house filtration at flow rates up to 20 gpm (75.7 lpm).

- **AP902** reduces sediment for up to 100,000 gallons (378,541 liters), while providing unrestricted flow with 1" NPT connections. This filter is ideal for larger homes and light commercial applications.
- **AP903** reduces sediment and chlorine taste and odor for up to 100,000 gallons (378,541 liters), while providing unrestricted flow with 1" NPT connections. This filter is ideal for larger homes and light commercial applications.

### PRODUCT BENEFITS

- 304 stainless steel head allows for "sweat in place" installation and is a non-corrosive material.
- 1" inlet and outlet connections for easy installation and high flow rates up to 20 gpm (75.7 lpm).
- Tested and rated to 20 gpm (75.7 lpm) flow rate, meeting most residential and light commercial applications.
- Sanitary Quick Change (SQC) design, an industry first for this application, allows for fast and easy cartridge change-outs without the need of a filter wrench.
- Rated for 100,000 gallons (378,541 liters) or one year of normal water conditions, reduces inconvenient and frequent cartridge change-outs.
- Electronic countdown timer refrigerator magnet included in the installation kit to help remind the homeowner when cartridge change-out time is near. (coming soon)
- Manufactured from FDA CFR-21 compliant materials.
- 25 year limited warranty on stainless steel head.

### PRODUCT SPECIFICATIONS

Model Number	Part Number	Reduction Claims	Inlet/Outlet Size	Dimensions (Ht. x Dia.)	Approx. Weight	Service Flow Rate	Temperature Range	Pressure Range	Degree of Filtration	Replacement Cartridge
AP902	56211-01	Sediment	1" NPT	25 1/16" x 4 1/2" (63.7 cm x 11.4 cm)	7.0 lbs. (3.2 kg)	20 gpm (75.7 lpm)	40 - 100°F (4.4 - 37.8°C)	25 - 125 psi (172 - 862 kPa)	5 Micron Nominal	AP910R: 56210-01
AP903	56211-02	Sediment, Chlorine Taste and Odor	1" NPT	25 1/16" x 4 1/2" (63.7 cm x 11.4 cm)	7.5 lbs. (3.4 kg)	20 gpm (75.7 lpm)	40 - 100°F (4.4 - 37.8°C)	25 - 125 psi (172 - 862 kPa)	5 Micron Nominal	AP917R: 56210-03

